
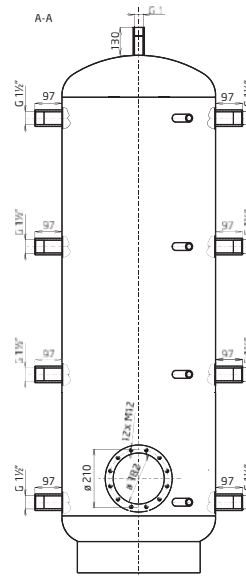



NAD 500 v3 NAD 750 v3 NAD 1000 v3

NAD v3 accumulation tanks are produced in two versions: with a flange with screw spacing of 210 mm for a TPK flange heating element, and without a flange, but with sockets only. The flange is plugged in the basic design.

Accumulation tanks are supplied with a high-quality insulation Symbio made of polyester fleece.



Maximum pressure in the tank	0.3 MPa
Maximum heating water temperature in the tank	90 °C

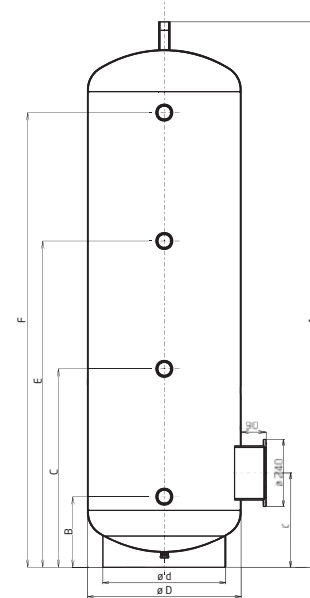

Volume [l]	Diameter D [mm]	Diameter d [mm]	A	B	C	E	F	K
500	600	440	1990	259	717	1175	1635	344
750	750	550	2020	271	729	1187	1647	356
1000	850	600	2053	286	744	1202	1662	371